

# UNI-HEAT

*Unvented water heater for the farm*

Now available:  
400 & 500 litre  
models

## Main features...

- Scratch-resistant Plastisol coating
- Inner vessel made of Duplex stainless steel
- 60mm polyurethane CFC-free insulation
- Maximum operating pressure: 6 Bar
- Maximum immersion operating temperature: 85°C
- Unique inlet baffle blends cold and hot water
- Suitable for use with drinking water

## Equipment included...

- Temperature and pressure relief valve, 7Bar 90°C pre-installed
- 1 x 1¾" 3kW titanium immersion heater fitted with 2 immersion heaters fitted on 305 – 500 litre models



**To order call: 0800 597 6411**

**Fabdec Ltd**, Grange Road, Ellesmere, Shropshire, SY12 9DG  
Tel: +44 (0) 1691 627200 Email: [sales@fabdec.com](mailto:sales@fabdec.com)  
[www.fabdec.com](http://www.fabdec.com)

Product and pricing information is for general guidance only and may be altered or amended without notice.




# UNI-HEAT

*Unvented water heater for the farm*

## Dimensions & Pricing

Size (l)	A	B	C	D	E	F	Immersion bosses	Inlet/Outlet BSP female
	mm							
150 litre	576	1085	182	196	222	n/a	1	¾"
175 litre	576	1242	182	196	222	n/a	1	¾"
215 litre	576	1484	182	196	222	n/a	1	¾"
255 litre	576	1752	182	196	222	n/a	1	¾"
305 litre	576	2028	182	196	222	725	2	1"
400 litre	756	1405	220	235	262	515	2	1"
500 litre	756	1690	220	235	262	660	2	1"

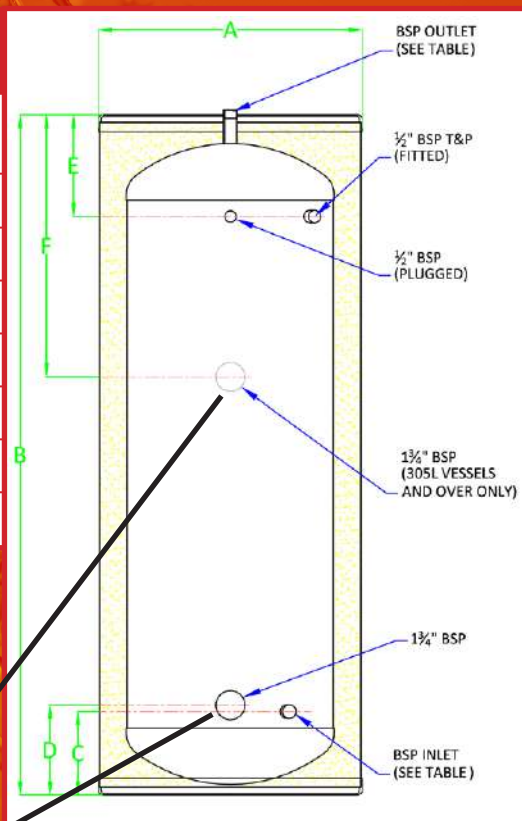

1 immersion heater 1 3/4" BSP 3kW, 1ph is fitted. 2 are fitted on 305-500 litre vessels.

**To order call: 0800 597 6411**

**Fabdec Ltd**, Grange Road, Ellesmere, Shropshire, SY12 9DG  
 Tel: +44 (0) 1691 627200 Email: sales@fabdec.com  
[www.fabdec.com](http://www.fabdec.com)

Product and pricing information is for general guidance only and may be altered or amended without notice.  
 \*Prices shown are retail, net, ex works, valid until end of 2015.

